

Kontaktscheibe

NFE 25-511 - mittlere Form "M"

Für Schrauben von	d min.-max.	D min.-max.	s min.-max.	Anzahl Lamellen	Gewicht kg/1000 St.	h min.-max.	Verpackungseinheit
M 3,0	3,10-3,35	7,71-8,29	0,57-0,63	28	0,180	0,80-1,00	1.000
M 4,0	4,10-4,40	9,71-10,29	0,86-0,94	32	0,430	1,15-1,40	1.000
M 5,0	5,10-5,40	11,65-12,35	1,06-1,14	36	0,720	1,45-1,80	1.000
M 6,0	6,10-6,40	13,65-14,35	1,26-1,34	45	1,150	1,75-2,10	1.000
M 8,0	8,20-8,56	17,65-18,35	1,36-1,44	45	2,000	1,90-2,35	1.000
M 10,0	10,20-10,56	21,58-22,42	1,55-1,65	45	3,600	2,25-2,75	1.000
M 12,0	12,40-12,83	26,58-27,42	1,75-1,85	45	6,010	2,60-3,10	500
M 14,0	14,40-14,83	29,58-30,42	2,34-2,46	45	9,700	3,20-3,70	250
M 16,0	16,40-16,83	31,50-32,50	2,74-2,86	60	12,10	3,60-4,10	250
M 20,0	20,50-21,02	39,50-40,50	3,14-3,26	60	22,10	4,30-4,90	100

NFE 25-511 - breite Form "B"

M 3,0	auf Anfrage						
M 4,0	4,10-4,40	13,65-14,35	0,96-1,04	32	1,102	1,40-1,80	1.000
M 5,0	5,10-5,40	15,65-16,35	1,16-1,24	36	1,568	1,70-2,10	1.000
M 6,0	6,10-6,40	17,65-18,35	1,36-1,44	45	2,466	2,10-2,50	1.000
M 8,0	8,20-8,56	21,58-22,42	1,55-1,65	45	3,760	2,20-2,70	1.000
M 10,0	10,20-10,56	26,58-27,42	1,75-1,85	45	6,938	2,60-3,10	1.000
M 12,0	12,40-12,83	31,50-32,50	1,95-2,05	45	10,694	3,10-3,60	500

NFE 25-511 - schmale Form "S" (auch Form "E")

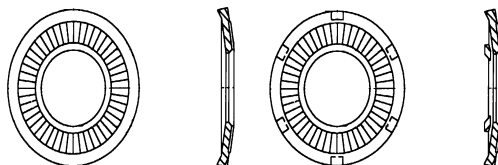
M 3,0	3,10-3,35	5,76-6,24	0,47-0,53	28	0,070	0,70-0,90	1.000
M 4,0	4,10-4,40	7,71-8,29	0,77-0,83	32	0,200	1,00-1,20	1.000
M 5,0	5,10-5,40	9,71-10,29	0,96-1,04	36	0,400	1,25-1,50	1.000
M 6,0	6,10-6,40	11,65-12,35	1,16-1,24	45	0,707	1,55-1,85	1.000
M 8,0	8,20-8,56	15,65-16,35	1,36-1,44	45	1,500	1,80-2,20	1.000
M 10,0	10,20-10,56	19,58-20,42	1,55-1,65	45	2,640	2,10-2,60	1.000
M 12,0	12,40-12,83	23,58-24,42	1,75-1,85	45	4,350	2,40-2,90	500

SN 70093 - gezahnte Form "K" (teilweise auch Form "P" genannt)

M 3,0	3,10-3,35	5,80-6,20	0,57-0,63	28	0,087	0,80-0,95	1.000
M 4,0	4,10-4,40	7,80-8,20	0,77-0,83	32	0,200	1,00-1,15	1.000
M 5,0	5,10-5,40	9,80-10,20	0,97-1,03	36	0,410	1,25-1,50	1.000
M 6,0	6,10-6,40	11,80-12,20	1,16-1,24	45	0,680	1,50-1,80	1.000
M 6,0	6,10-6,40	17,65-18,35	1,36-1,44	45	2,430	1,50-1,80	1.000
M 8,0	8,20-8,56	13,65-14,35	1,36-1,44	45	1,040	1,95-2,40	1.000
M 8,0	8,20-8,56	15,80-16,20	1,36-1,44	45	1,500	1,95-2,40	1.000
M 8,0	8,20-8,56	21,58-22,42	1,36-1,44	45	3,480	1,95-2,40	1.000
M 10,0	10,20-10,56	19,75-20,25	1,56-1,64	45	2,680	2,15-2,60	1.000
M 12,0	12,40-12,83	23,75-24,25	1,56-1,64	45	3,850	2,15-2,60	500
M 14,0	14,40-14,83	23,75-24,25	1,56-1,64	60	3,210	2,05-2,50	500
M 16,0	16,40-16,80	31,70-32,30	2,44-2,56	60	10,90	3,50-3,95	200
M 20,0	20,50-21,00	39,70-40,30	2,94-3,06	60	21,30	4,20-4,65	100

Ausführungen: roh gefettet
 mechanisch verzinkt
 Zinklamelle
 andere Oberflächenausführungen auf Anfrage

Technische Lieferbedingungen gem. NFE 25-511


Kontaktscheibe
NFE 25-511 - mittlere Form "M"

Für Schrauben von	d min.-max.	D min.-max.	s min.-max.	Anzahl Lamellen	Gewicht kg/1000 St.	h min.-max.	Verpackungseinheit
M 3,0	3,10-3,35	7,71-8,29	0,57-0,63	28	0,18	0,80-1,00	1.000
M 4,0	4,10-4,40	9,71-10,29	0,86-0,94	32	0,43	1,15-1,40	1.000
M 5,0	5,10-5,40	11,65-12,35	1,06-1,14	36	0,72	1,45-1,80	1.000
M 6,0	6,10-6,40	13,65-14,35	1,26-1,34	45	1,15	1,75-2,10	1.000
M 8,0	8,20-8,56	17,65-18,35	1,36-1,44	45	2,00	1,90-2,35	1.000
M 10,0	10,20-10,56	21,58-22,42	1,55-1,65	45	3,60	2,25-2,75	1.000
M 12,0	12,40-12,83	26,58-27,42	1,75-1,85	45	6,01	2,60-3,10	500
M 14,0	14,40-14,83	29,58-30,42	2,34-2,46	45	9,70	3,20-3,70	250
M 16,0	16,40-16,83	31,50-32,50	2,74-2,86	60	12,1	3,60-4,10	250
M 20,0	20,50-21,02	39,50-40,50	3,14-3,26	60	22,1	4,30-4,90	100

NFE 25-511 - breite Form "B"

M 3,0	auf Anfrage						
M 4,0	4,10-4,40	13,65-14,35	0,96-1,04	32	1,102	1,40-1,80	1.000
M 5,0	5,10-5,40	15,65-16,35	1,16-1,24	36	1,568	1,70-2,10	1.000
M 6,0	6,10-6,40	17,65-18,35	1,36-1,44	45	2,466	2,10-2,50	1.000
M 8,0	8,20-8,56	21,58-22,42	1,55-1,65	45	3,760	2,20-2,70	1.000
M 10,0	10,20-10,56	26,58-27,42	1,75-1,85	45	6,938	2,60-3,10	1.000
M 12,0	12,40-12,83	31,50-32,50	1,95-2,05	45	10,694	3,10-3,60	500

NFE 25-511 - schmale Form "S" (auch Form "E")

M 3,0	3,10-3,35	5,76-6,24	0,47-0,53	28	0,070	0,70-0,90	1.000
M 4,0	4,10-4,40	7,71-8,29	0,77-0,83	32	0,200	1,00-1,20	1.000
M 5,0	5,10-5,40	9,71-10,29	0,96-1,04	36	0,400	1,25-1,50	1.000
M 6,0	6,10-6,40	11,65-12,35	1,16-1,24	45	0,707	1,55-1,85	1.000
M 8,0	8,20-8,56	15,65-16,35	1,36-1,44	45	1,500	1,80-2,20	1.000
M 10,0	10,20-10,56	19,58-20,42	1,55-1,65	45	2,640	2,10-2,60	1.000
M 12,0	12,40-12,83	23,58-24,42	1,75-1,85	45	4,350	2,40-2,90	500

SN 70093 - gezahnte Form "K" (teilweise auch Form "P" genannt)

M 3,0	3,10-3,35	5,80-6,20	0,57-0,63	28	0,087	0,80-0,95	1.000
M 4,0	4,10-4,40	7,80-8,20	0,77-0,83	32	0,200	1,00-1,15	1.000
M 5,0	5,10-5,40	9,80-10,20	0,97-1,03	36	0,410	1,25-1,50	1.000
M 6,0	6,10-6,40	11,80-12,20	1,16-1,24	45	0,680	1,50-1,80	1.000
M 8,0	8,20-8,50	15,80-16,20	1,36-1,44	45	1,500	1,95-2,40	1.000
M 10,0	10,20-10,60	19,75-20,25	1,56-1,64	45	2,680	2,15-2,60	1.000
M 12,0	12,40-12,80	23,75-24,25	1,56-1,64	45	3,850	2,15-2,60	500
M 14,0	14,40-14,83	23,75-24,25	1,56-1,64	60	3,210	2,05-2,50	500
M 16,0	16,40-16,80	31,70-32,30	2,44-2,56	60	10,90	3,50-3,95	200
M 20,0	20,50-21,00	39,70-40,30	2,94-3,06	60	21,30	4,20-4,65	100

Werkstoff rost- und säurebeständiger Edelstahl